

FILE NO. 03-1762
PAGE 635

03 APR -1 AM 6:49

PHYLLIS M. GERLACH
JACKSON COUNTY, IOWA
RECORDER

Fee \$6.00



Landmark

511 South 4th Street
Clinton, IA 52732
(563) 243-1398

UNITED STATES PUBLIC LAND SURVEY CORNER CERTIFICATE
OF

SLSI 9-90

Land Survey Monuments situated in Section 29, Township R4 NORTH, Range 6 EAST, of the Fifth Principal Meridian, JACKSON County, Iowa.

Previously recorded in N/A, Page N/A in County Recorder's Office.


(Show reason for preparing this certificate, the evidence and detailed procedures used in establishing the corner positions and monumentation found or placed.)

Monument Description and Remarks: SE COR SEC 29, 1/2" ROUND IRON ROD STAKE SET AS SHOWN: S 1/4 COR SEC 29, 1/2" ROUND IRON ROD STAKE SET AS SHOWN, AND SET MIDWAY BETWEEN ROAD RIGHT OF WAY FENCE LINES NORTH-SOUTH AND EAST-WEST

04-03-958

PLAN - VIEW

(Show a minimum of three reference ties to durable physical objects, relevant monuments and physical conditions that will enable

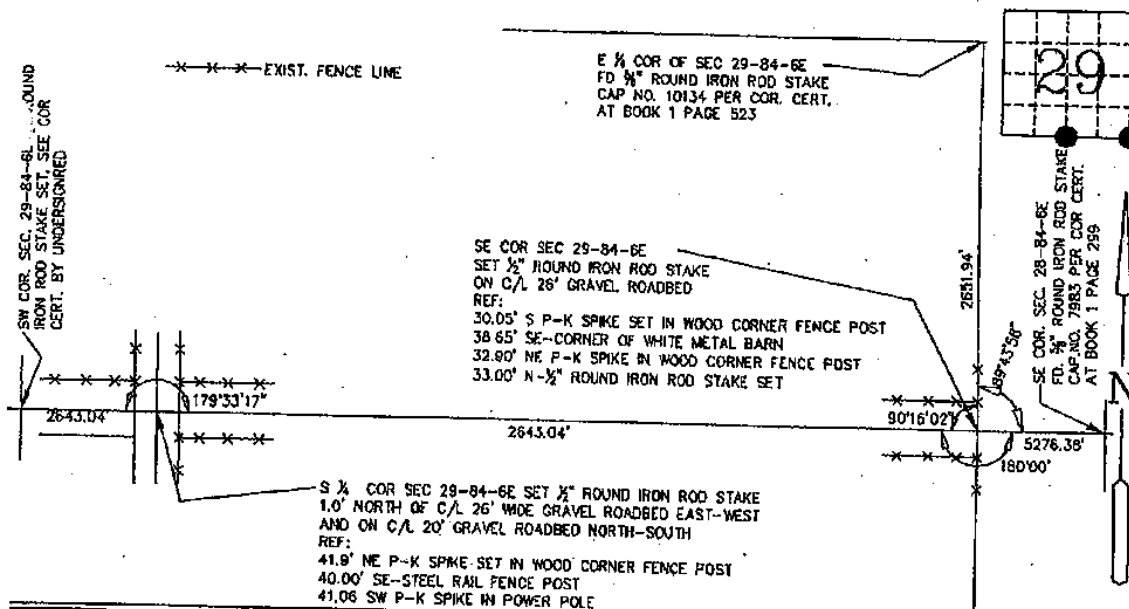

I hereby certify that this land surveying document was prepared and the related survey work was performed by me or under my direct personal supervision and that I am a duly licensed land surveyor under the laws of the State of Iowa.

Harry J. Goddard MAR 28, 2003
Harry J. Goddard Date

My license is subject to renewal on Dec. 31, 2004
License No. 15524

List Corners to be Indexed

Corners	Section	Twp	Range
SE COR	29	84 NORTH	6 EAST
S1/4 COR	29	84 NORTH	6 EAST



Only those copies of this page signed in red color and displaying surveyors original

Seal are to be considered certified official copies.
(Iowa Admin. Code 193C-1.30)

Book 1 Page 635

FILE NO. 04-2109
 2004 MAY 11 PM 2:44

PREPARED BY: EGGER ENGINEERING AND LAND SURVEYING, P.C.
 2395 TECH DRIVE SUITE 8 BETTENDORF, IOWA 52722 319-332-6888

PHYLLIS M. GERLACH
 JACKSON COUNTY, IOWA
 RECORDER
 Fee \$11.00

UNITED STATES PUBLIC LAND SURVEY CORNER CERTIFICATE
 OF

Land Survey Monuments situated in Section 29, Township 84 N., Range 6 E., of the Fifth Principal Meridian, Jackson County, Iowa. Previously recorded in (Not Recorded)


(Show reason for preparing this certificate, the evidence and detailed procedures used in establishing the corner positions and monumentation found or placed.)

Monument Description and Remarks: Both The NW Cor., NE 1/4 and The Center Of Section 29 were set by splitting the North/South Fence line and aligning with the East/West Fence intersecting corners.

PLAN - VIEW

(Show a minimum of three reference ties to durable physical object, relevant monuments and physical conditions that will enable recovery of the corner.)

Note: All Tie Dimensions Are Slope Measurements from PK Nails in Posts or Tree.

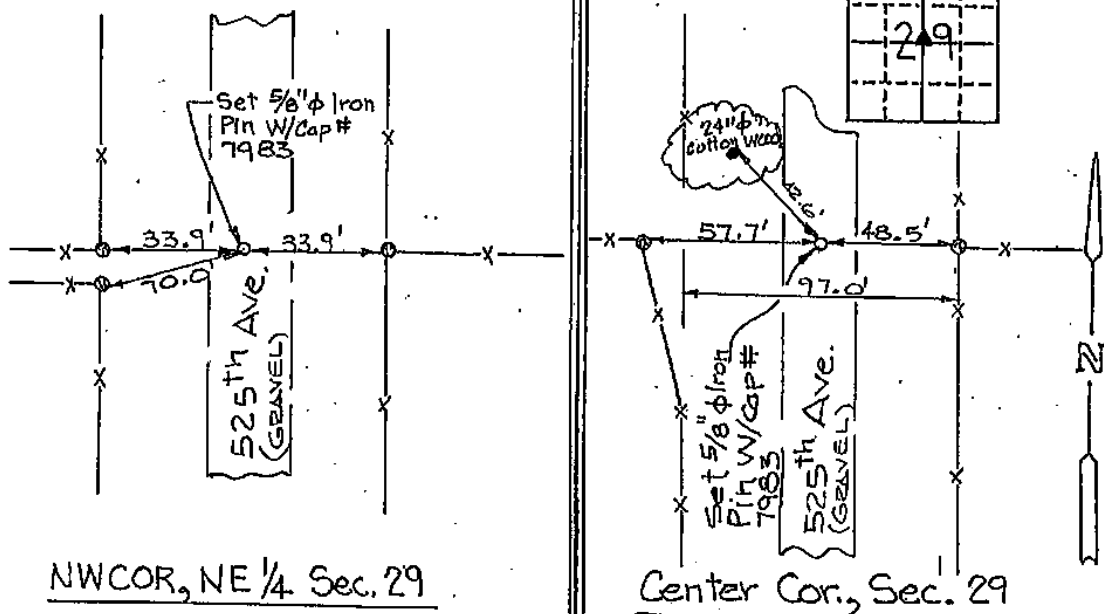


I hereby certify that the survey work was completed and this certificate was prepared by me or under my direct supervision and that I am a duly registered land surveyor under the laws of the state of Iowa.

Signature: James L. Egger
 James L. Egger L.S.

Date: April 6, 2004 Reg. No. 7983

SEAL



Corners	Section	Twp	Range
NW, NE 1/4	29	84 N.	6 E.
Center	29	84 N.	6 E.

Document 19-1453

Type 15 001 Pages 1
Date 5/22/2019 Time 12:03 PM
Rec Amt \$7.00

ARLENE SCHAUF, RECORDER/REGISTRAR
JACKSON COUNTY IOWA

UNITED STATES PUBLIC LAND SURVEY CORNER CERTIFICATE

Land Survey Monuments Situated In Section 29, Township 84 North, Range 6 East of the Fifth Principal Meridian,
Jackson County, Iowa.

Narrative:




Certificate prepared for the NW corner of the NE 1/4 NW 1/4 for set corner at the midpoint online between NW corner NW 1/4 NW 1/4 NE corner NE 1/4 NW 1/4 Sec 29. No ties previously recorded.

Reset and Certificate prepared for the NE corner of the NE 1/4 NW 1/4 at the distance distance intersection of the North line of the NW 1/4 Section 29 and the East line of the SE 1/4 Section 20 as shown on Corner Certificates recorded in Book 2, Page 263.


Certificate prepared for the SE corner NE 1/4 NW 1/4 at the midpoint between the found SE corner SE 1/4 NW 1/4 & NE corner NE 1/4 NW 1/4. No previous ties existed.

NW CORNER NE 1/4 NW 1/4

NE CORNER NE 1/4 NW 1/4

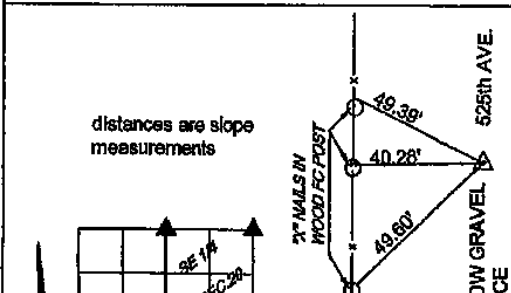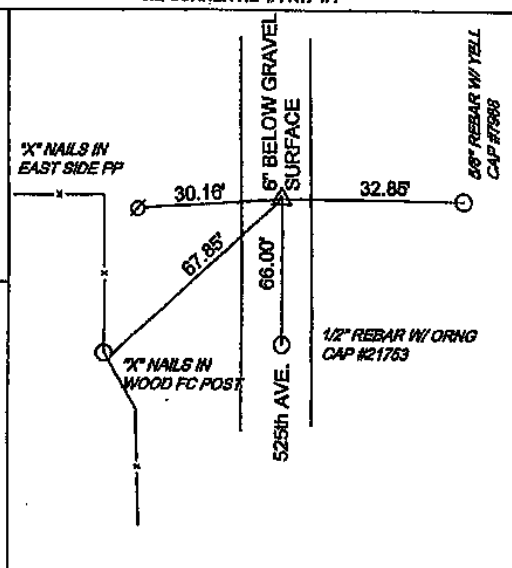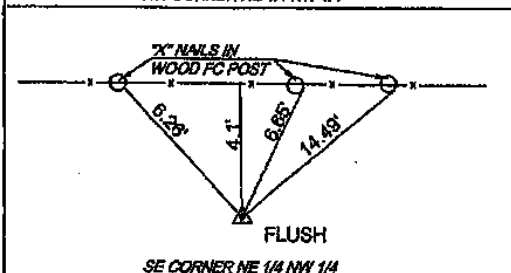

distances are slope measurements



Corners to be indexed:
NE CORNER NE 1/4 NW 1/4 Sec.29 T84N R6E
NW CORNER NE 1/4 NW 1/4 Sec.29 T84N R6E
SE CORNER NE 1/4 NW 1/4 Sec.29 T84N R6E

Set 1/2" rebar with orange cap LS #21753



I hereby certify that this land surveying document was prepared and the related survey work was performed by me or under my direct personal supervision and that I am a duly licensed Land Surveyor under the Laws of the State of Iowa.

Duane K. Jacobs 4/30/19
(Signature) (Date)

DUANE K. JACOBS, PLS
License number: 21753
My license renewal date is December 31, 2020
Pages or sheets covered by this work: 2