
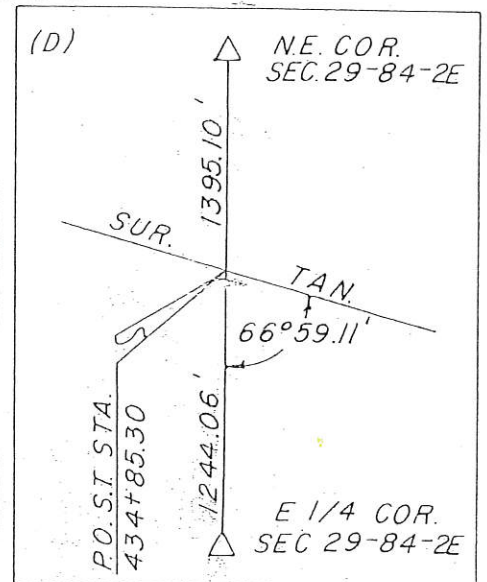
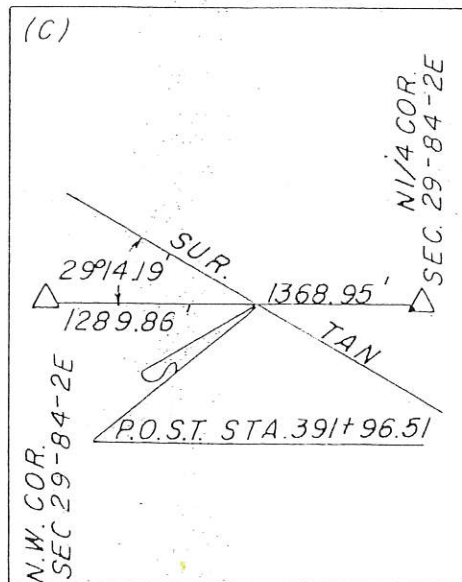


Sec. 29

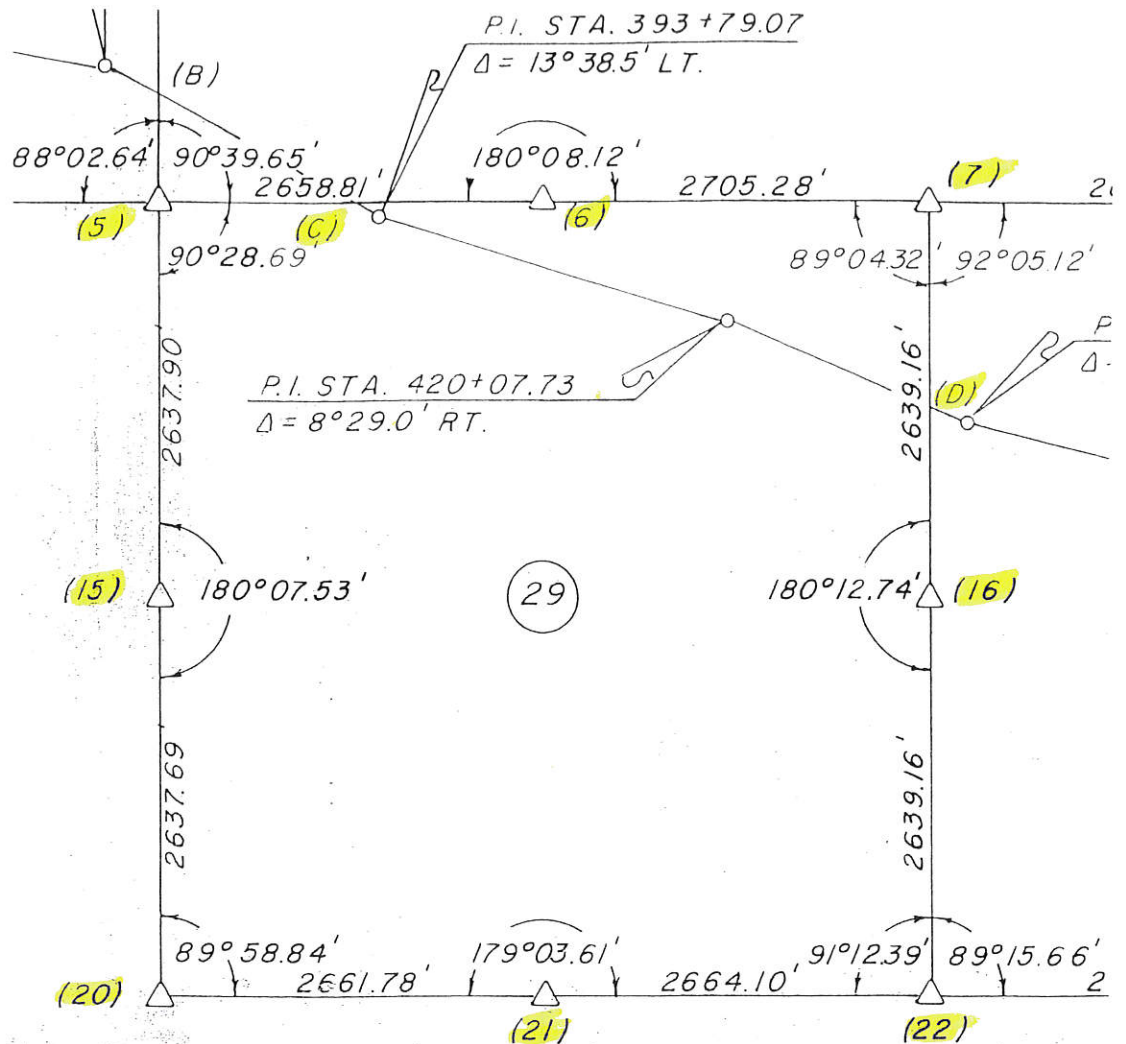

LAND CORNER SURVEY
JACKSON COUNTY
PROJ. NO. FN-64-2(15)--21-49
T 84 N R 2 E

MADE FOR
IOWA DEPARTMENT OF TRANSPORTATION FOR
PURPOSE OF ROW DESCRIPTION ON IA. HY. 64
FROM MONMOUTH TO MAQUOKETA.


I HEREBY CERTIFY THAT THIS PLAT AND SURVEY
WERE MADE BY ME OR UNDER MY DIRECT PERSONAL
SUPERVISION AND THAT I AM A DULY REGISTERED
LAND SURVEYOR UNDER THE LAWS OF THE STATE
OF IOWA

ASSISTED BY L.B. MCGUIRE, D.L. STODOLSKY, ROBERT NEMEC, J.C. HOWARD
AND JOHN REEDER

DATE FEB 26, 1979


John T. W. [Signature]
JOHN T. W. [Signature] N.E. NO 5405

(5) S.E. COR.
SEC. 19-84-2E

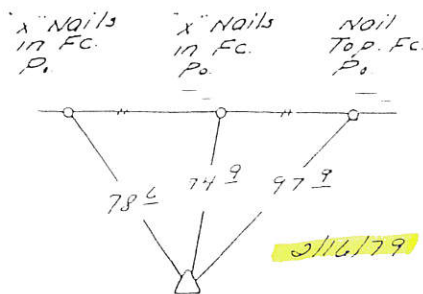


SET D.O.T. MON.
15" DEEP

(6) N 1/4 COR.
SEC. 29-84-2E

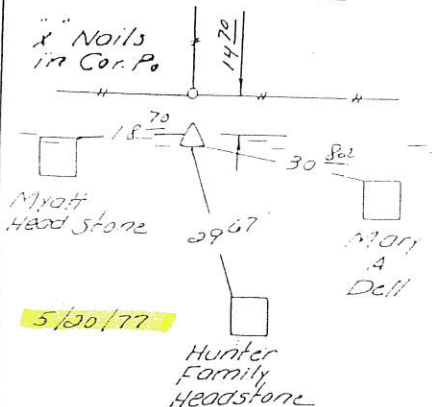


SET D.O.T. MON.
6" DEEP

(7) N.E. COR.
SEC. 29-84-2E

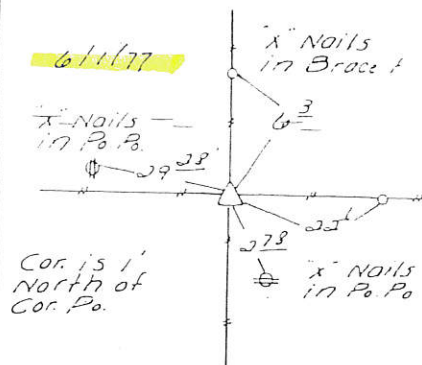


SET D.O.T. MON.
5" DEEP

(15) W 1/4 COR.
SEC. 29-84-2E

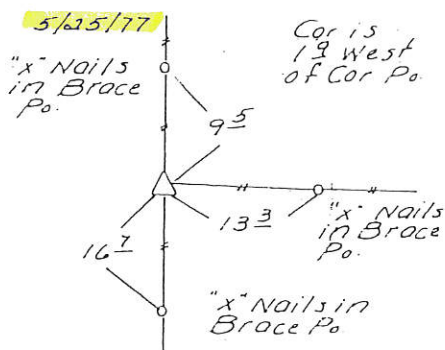


FOUND 4"x10"x12" LIMESTONE
2" DEEP

(16) E 1/4 COR.
SEC. 29-84-2E

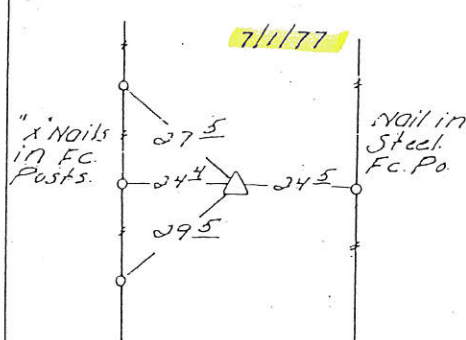


SET D.O.T. MON.
2" DEEP

(20) SW COR.
SEC. 29-84-2E

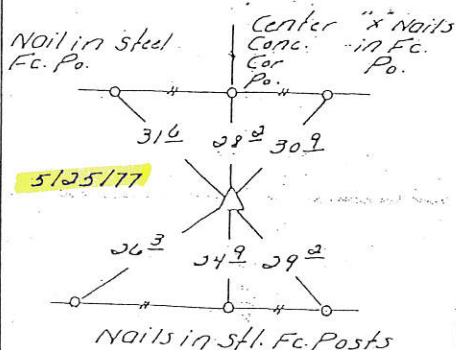


FOUND 3"x6"x12" LIMESTONE
18" DEEP. SET IRON ROD ABOVE

(21) S 1/4 COR.
SEC. 29-84-2E

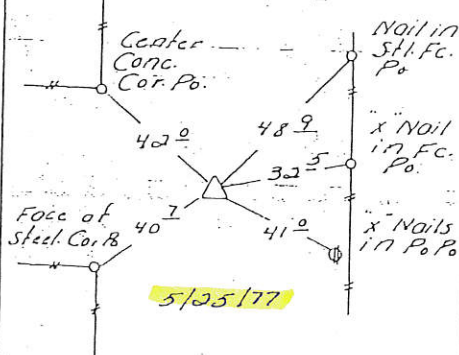

FOUND 3"x6"x6" GRANITE
STONE. LOWERED & SET IRON ROD

(22) SE COR.
SEC. 29-84-2E

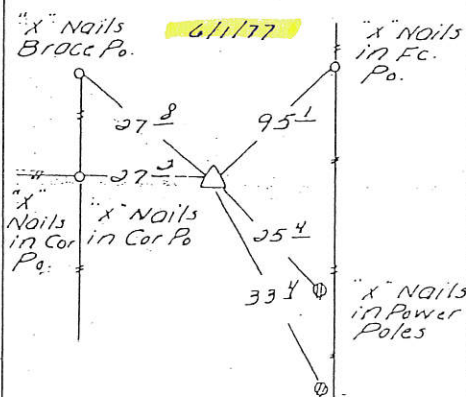

FOUND GAS PIPE
FLUSH



Document 11-605

Book 2 Page 755 Type 15 001 Pages 1
Date 2/11/2011 Time 11:09 AM
Rec Amt \$9.00

ARLENE SCHAUF, RECORDER/REGISTRAR
JACKSON COUNTY IOWA

PREPARED BY & RETURN TO DAVE JOENS, SNYDER & ASSOCIATES, INC. 2727 SW SNYDER ROAD, ANKENY, IOWA 50023 (515) 964-2020

UNITED STATES PUBLIC LAND SURVEY CORNER CERTIFICATE OF

Land Survey Monuments situated in Section 29, Township 84 N, Range 02 E, of the Fifth Principal Meridian, JACKSON, County, Iowa.
Previously recorded in N/A in County Recorder's Office.
(book, page, document number, ect.)


(Show reason for preparing this certificate, the evidence and detailed procedures used in establishing the corner positions and monumentation found or placed.)

Monument Description and Remarks:

THERE IS NO CERTIFICATE FOR THIS CORNER ON FILE AT THE JACKSON COUNTY RECORDER'S OFFICE.
RE-ESTABLISHED CORNER USING EXISTING IDOT TIES FROM PROJECT NO. F-64-2(15)--21-49


Plan-View

(Show a minimum of three reference ties to durable physical objects, relevant monuments and physical conditions that will enable recovery of the corner.)



NE CORNER


FOUND ALUMINUM CAP IN 3" STEEL PIPE (3" DEEP)

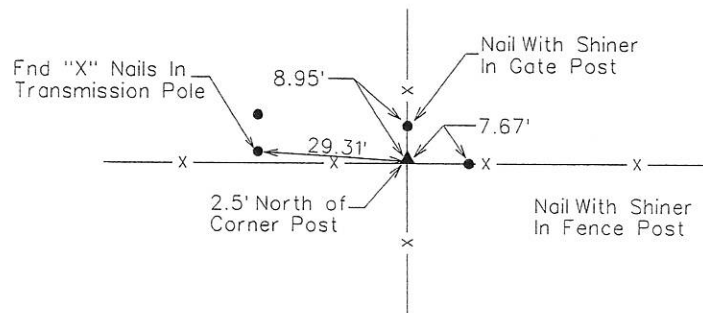

NOTE: ALL DISTANCES MEASURED HORIZONTAL UNLESS OTHERWISE NOTED.

S&A F9

ASK
2/8/2011
\\Section_Corner\\S&A_Section_Certificate\\TNP_ENG_SEC_PROJECT_HUN\\84-02-29-NE_100150.dgn



I hereby certify that this land surveying document was prepared and the related survey work was performed by me or under my direct personal supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Iowa.

Dave Joens 2/8/2011
Dave L. Joens, PLS Date

License Number 11579

My License Renewal Date is December 31, 2012

Pages or sheets covered by this seal:

SHEET 1 OF 1

List Corners to be Indexed

Corners	Section	Twp	Range
NE CORNER	29	84	02
SE CORNER	20	84	02
SW CORNER	21	84	02
NW CORNER	28	84	02

TECH: JCC

PN: 84-02-29-NE 110.0150

DATE: 1/18/11

Book 2 Page 755



Document 11-606

Book 2 Page 756 Type 15 001 Pages 1
Date 2/11/2011 Time 11:09 AM
Rec Amt \$9.00

ARLENE SCHAUF, RECORDER/REGISTRAR
JACKSON COUNTY IOWA

PREPARED BY & RETURN TO DAVE JOENS, SNYDER & ASSOCIATES, INC. 2727 SW SNYDER ROAD, ANKENY, IOWA 50023 (515) 964-2020

UNITED STATES PUBLIC LAND SURVEY CORNER CERTIFICATE OF

Land Survey Monuments situated in Section 29, Township 84 N, Range 02 E, of the Fifth Principal Meridian, JACKSON County, Iowa.
Previously recorded in N/A in County Recorder's Office.
(book, page, document number, ect.)


(Show reason for preparing this certificate, the evidence and detailed procedures used in establishing the corner positions and monumentation found or placed.)

Monument Description and Remarks:


THERE IS NO CERTIFICATE FOR THIS CORNER ON FILE AT THE JACKSON COUNTY RECORDER'S OFFICE.
RE-ESTABLISHED CORNER USING EXISTING IDOT TIES FROM PROJECT NO. F-64-2(15)--21-49

Plan-View

(Show a minimum of three reference ties to durable physical objects, relevant monuments and physical conditions that will enable recovery of the corner.)




W 1/4 CORNER
FOUND STONE (2" DEEP)

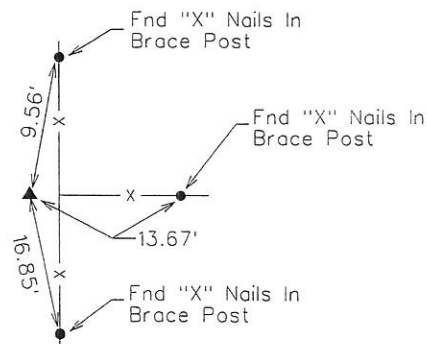

NOTE: ALL DISTANCES MEASURED HORIZONTAL UNLESS OTHERWISE NOTED.

2/8/2011
\\Section_Corner\\S&A_Section_Certificate\\WP_RNG_SEC_PROJECT_MAIN\\84-02-29-W-1100150.dgn

S&A F3



I hereby certify that this land surveying document was prepared and the related survey work was performed by me or under my direct personal supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Iowa.
Dave Joens 2/8/2011
Dave L. Joens, PLS Date
License Number 11579
My License Renewal Date is December 31, 2012
Pages or sheets covered by this seal:
SHEET 1 OF 1

List Corners to be Indexed

Corners	Section	Twp	Range
WEST 1/4 CORNER	29	84	02
EAST 1/4 CORNER	30	84	02

Book 2 Page 756

TECH: JCC

PN: 84-02-29-W 110.0150

DATE: 1/18/11



Document 12-2625

Book 3 Page 56 Type 15 001 Pages 1
Date 6/26/2012 Time 10:29 AM
Rec Amt \$7.00

ARLENE SCHAUF, RECORDER/REGISTRAR
JACKSON COUNTY IOWA

PREPARED BY: MICHAEL J. WEBER, WEBER SURVEYING, LLC, 26789 46TH AVE, BERNARD, IA 52032 (563) 879-4173

UNITED STATES PUBLIC LAND SURVEY CORNER CERTIFICATE OF

LAND SURVEY MONUMENTS SITUATED IN SECTION 29, TOWNSHIP 84 NORTH, RANGE 2 EAST
OF THE FIFTH PRINCIPAL MERIDIAN, JACKSON COUNTY, IOWA.
PREVIOUSLY RECORDED NONE UNLESS NOTED BELOW
(book, page, document number, etc.)

(Show reason for preparing this certificate, the evidence and detailed procedures used in establishing the corner positions and monumentation found or placed.)

Monument Description and Remarks:

-NORTH 1/4 COR. SEC. 29, T.84N. R.2E. OF THE 5TH P.M. FOUND 4" DIA ALUMINUM IDOT MONUMENT PER SECTION CORNER TIE FOR HWY 64 FOUND IN THE COUNTY ENGINEERS OFFICE.

(Show a minimum of three reference ties to durable physical objects, relevant monuments and physical conditions that will enable recovery of the corner.)

